


# Measurement & Spectroscopy

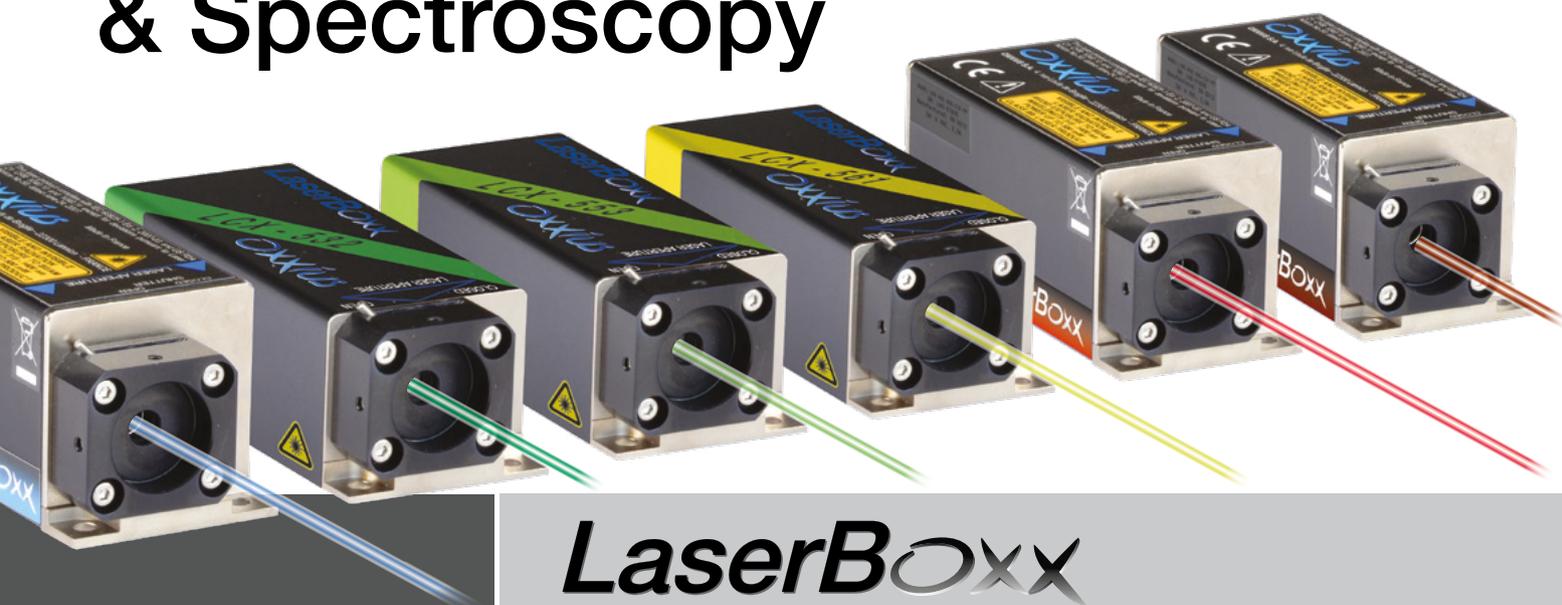

## All-in-One laser

Raman Spectroscopy  
Brillouin Scattering  
Interferometry  
Photoluminescence  
Holography  
Laser Doppler Velocimetry  
Laser Ultrasonic  
Dynamic Light Scattering

## LaserBoxx

One platform for all colors

### SLM CW Monolithic DPSS benefits

- Up to 500 mW
- Exceptional wavelength stability - 1pm
- Lowest power consumption
  - ▶  $\leq 12$  W for LCX's & LPX's, any wavelength, less than 200 mW
  - ▶  $\leq 15$  W for LCX-532 & LCX-1064, 500 mW
  - ▶  $\leq 15$  W for LCX-561 300 mW
  - ▶  $\leq 15$  W LPX-640, 250 mW
- Low profile laser head (32 mm)
- Tailored beam diameter capability (0.6 up to 1.4 mm)

### VBG stabilized Laser Diode modules benefits

- Proprietary SLM locking routine
- Enhanced beam quality versions

### Common key features

- Single Longitudinal mode
- TEM<sub>00</sub> Beam
- Beam pointing  $\leq 5 \mu\text{m}/^\circ\text{C}$
- SM/PM/MM fiber coupling options
- USB and RS232 computer interface
- Graphic User Interface with remote diagnostics
- Remote *ControlBoxx* with power display (Plug&Play versions - CDRH)
- Controllers integrated into laser head
- LBX and LCX - Industry standard footprint (100 x 40 mm<sup>2</sup>)

532

553

561

633

640

785

830

1064

# Specifications

# Single Frequency Lasers

	LCX-532S	LCX-553S	LCX-561S	LPX-640S	LCX-1064S	LBX-633S	LSX-785S-ISO	LBX-830S
Technology	DPSS					Stabilized laser diode		
<b>Optical characteristics</b>								
Emission wavelengths	532.3 nm ± 0.3 nm <sup>(1)</sup>	553.0 nm ± 0.4 nm	561.4 nm ± 0.4 nm <sup>(1)</sup>	639.6 nm ± 0.4 nm	1064.6 nm ± 0.5 nm	632.5 nm ± 0.5 nm	785 nm ± 0.5 nm	830 nm
Wavelength Stability over 8 hours and ±3°K	≤ 1 pm					≤ 10 pm ± 0.5 nm		
Linewidth	≤ 1 MHz					≤ 100 MHz typ.		
Coherence Length	≥ 100 m					≥ 1 m typ.		
Nominal output power, continuous wave	50 mW to 500 mW	50 mW to 200 mW	100 mW to 300 mW	50,100, 250 mW	100 mW to 500 mW	40 mW	150 mW with isolator	100 mW
Control mode	Automatic power control (APC)					Automatic current control (ACC)		
Power stability over 8 hours and ±3°K	± 1%							
Option Power Adjustment	30-100%	50-100%	30-100%	30-100%	30-100%	Optional L1C MPA		
Optical noise % RMS, 10Hz - 20MHz bandwidth	≤ 0.2%							
<b>Transverse singlemode free-space beam (*)</b>								
Beam waist diameter (typ.) at 1/e <sup>2</sup> , 50mm from output aperture	0.7 ± 0.1 mm					0.5 to 1.0 mm	0.5 ± 0.1 mm	0.5 to 1.0 mm
Beam divergence at 1/e <sup>2</sup> , full angle, in far field	1.0 ± 0.2 mrad				2.0 ± 0.4 mrad	2 to 4 mrad	≤ 1.7 mrad	2 to 4 mrad
Beam quality factor (M <sup>2</sup> )	≤ 1.1					≤ 1.9	≤ 1.25	≤ 1.9
Beam circularity in far field	≥ 90%					≥ 65%	≥ 90%	≥ 65%
Beam pointing stability	≤ 5 μrad/°K							
Polarization state	linear, vertical							
Polarization extinction ratio (typ.)	1000:1					100:1		
<b>PM fiber coupling option (*)</b>								
Nominal output power	35 mW to 350 mW	35 mW to 140 mW	35 mW to 210 mW	70 mW to 175 mW	35 mW to 350 mW	20 mW	105 mW	40 mW

(1) ± 0.5 nm at 500 mW  
 \* Specifications at nominal power  
 Other available wavelengths: 405 nm, 946 nm

System Specifications			
Version	LCX, LPX, LSX, LBX-S	LCX and LPX	LSX and LBX-S
CDRH compliance	Yes	No	
Device qualification	Plug and play	OEM	OEM
Operating temperature	10 - 30 °C (ambient)	10 - 50 °C (baseplate)	20 - 35 °C (baseplate)
Power Consumption	≤ 25 W	≤ 20 W	≤ 10 W
Storage temperature	0 - 60 °C		
Supply voltage	100 - 240V AC external power supply	5 - 12V DC	
Warm-up time	≤ 10 minutes (LCX, LPX) / ≤ 2 minutes (LSX, LBX)		
Communication interfaces	USB, RS-232, dedicated I/O interface		
Laser head dimensions	see drawings	100 x 40 x 32 mm <sup>3</sup> (LCX) 120 x 40 x 32 mm <sup>3</sup> (LPX)	100 x 40 x 40 mm <sup>3</sup> (LBX-S) 120 x 40 x 40 mm <sup>3</sup> (LSX)
Laser head weight	≤ 600 g including heatsink	≤ 250 g	≤ 330 g
Electronic	integrated into laser head		
<b>Controller Plug&amp;Play</b>			
Controller with Power adjustment	ControlBoxx	optional	
Controller fixed power	RemoteBoxx		

- ### Custom Capabilities
- o Wavelength tunability up to 10 pm
  - o Tighter wavelength selection
  - o Custom wavelengths
  - o Opto-mechanical Subassemblies including:
    - Wavelengths combiner ( L2C, L4C, L6C)
    - AO modulator (see L1C datasheet)
    - Specific beam diameter or beam shaping
  - o Custom control interface
  - o Extended operational temperature range

## Advanced features with L1C platform



The L1C platform offers an efficient, compact and cost effective solution to add advanced features to the LCX, LPX, LSX or LBX-S lasers:

- L1C-MPA – Motorized Power Attenuator
- L1C-AOM – Acousto-Optic Modulator – DC 3MHz
- L1C-ISO – ≥ 25dB Isolation and transmission ≥ 85%. It comes in standard with the electromechanical shutter.

## Electro-Mechanical shutter option

The ACX-SHTE is a compact and affordable electro-mechanical shutter. It is mounted directly on the LCX or LPX in place of the standard manual shutter.



The fiber coupling and other options are fully compatible with the electro mechanical shutter. The ACX-SHTE is actuated via the LCX or LPX embedded software or via a standard TTL signal.

## LCX & LPX - DPSS Monolithic Resonator

**Technology**  
 The unique feature of the LaserBoxx DPSS is a proprietary, Alignment-free Monolithic Resonator (AMR). The elements of resonator are assembled into a single ultra-low-loss optical subsystem, using a proprietary crystal bonding technique.

A highly transparent compound, deposited on chemically activated end-faces of two crystals, creates a bond that is extremely robust over time, temperature variations, and insensitive to mechanical vibrations. Dielectric mirrors coated at the end-faces of the crystals complete the monolithic assembly with no moving parts.




**Benefits of the AMR**  
 The OXXIUS AMR technology offer the highest spectral quality of the market and a high robustness over the time. The LCX & LPX lasers are insensitive to temperature variations and mechanical vibrations. High stability and reliability.


## LBX & LSX Platform

**Technology**  
 LBX & LSX lines are performing driver integrated platforms for stabilized laser diode.


**Benefits**  
 LBX-S and LSX-S deliver ultra narrow linewidth thanks to its excellent temperature stability and low noise current. The Oxxius proprietary embedded firmware locks the laser on same mode at each start up.

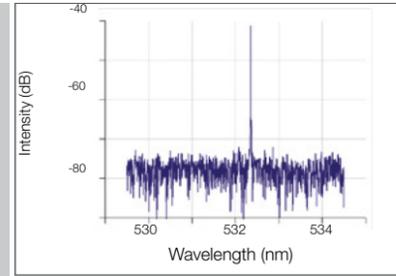


Single Longitudinal Mode LCX-532S spectrum

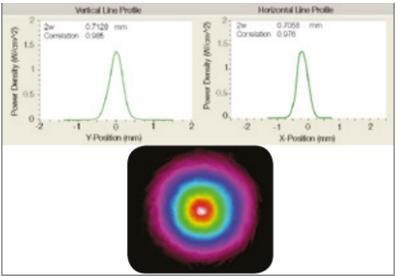

Beam Profile LCX-553S-200

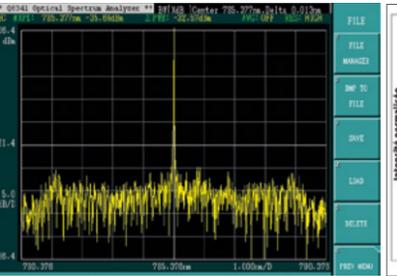


Single Longitudinal Mode LSX-785S spectrum

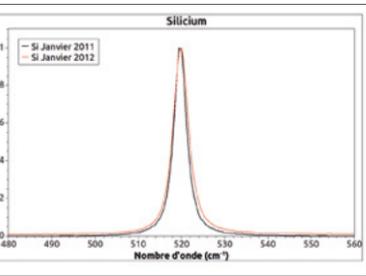


Si Raman Spectrum obtained with LSX-785S


Wavelength Stability LCX-561S wavelength vs time

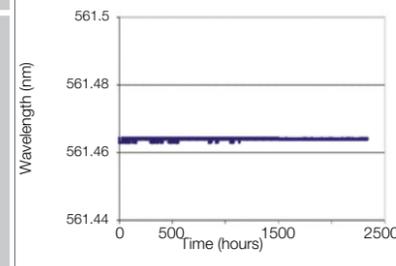


Power Stability LCX-561S power vs temperature

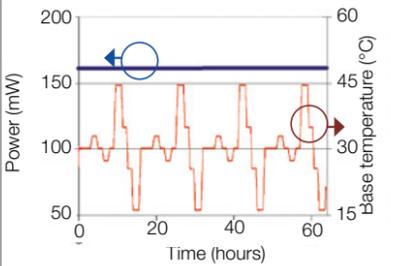

Beam Profile LBX-633S

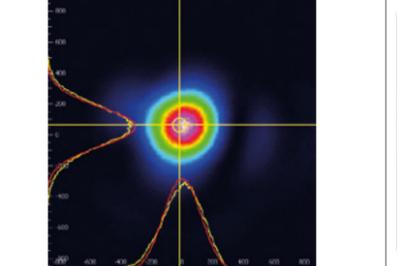

LiNb Raman Spectrum obtained with LSX-785S

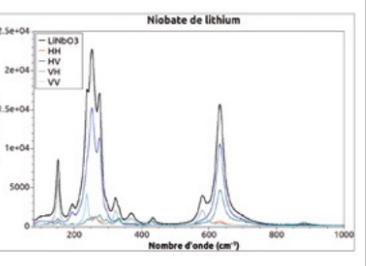

## Fiber coupling options

Fiber coupling options offer rugged and compact solutions to couple LaserBoxx into polarization maintaining fiber, standard single mode fiber or multimode fiber.




SM, PM & MM Fiber coupling


Specifications		
SM and PM Fiber		MM Fiber (50 μm, 0.22 NA)
≥ 70 % (except LBX-S)	<b>Coupling Efficiency</b>	≥ 80 %
100 :1	<b>Polarization Ratio</b> (PMF only)	n/a
FC-APC FC/PC, FCP8 on demand	<b>Fiber Output Connector</b>	SMA
± 2 %	<b>Power Stability</b> over 8 hours, ± 1.5 °C	± 2 %
2.0 m	<b>Fiber length</b>	2.0 m

# Mechanical Drawings


LCX series, Plug & Play  
DPSS Laser

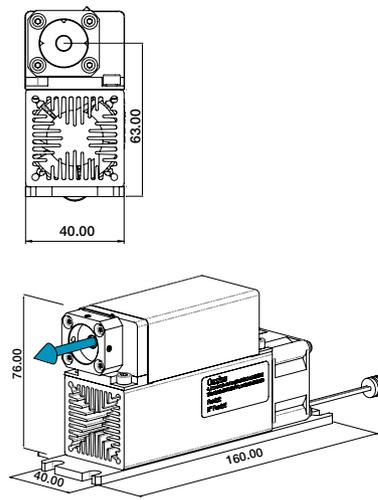


LPX series, Plug & Play  
DPSS Laser

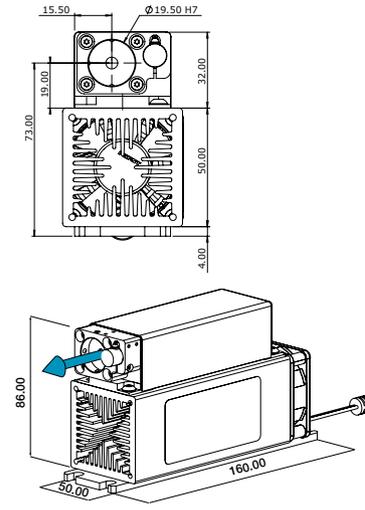


LBX series, Plug & Play  
Stabilised laser diode

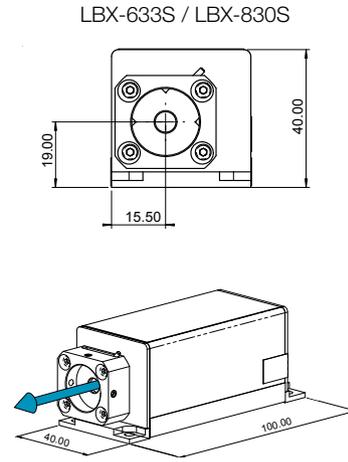

LSX series, Plug & Play  
Stabilized laser diode  
Integrated isolator

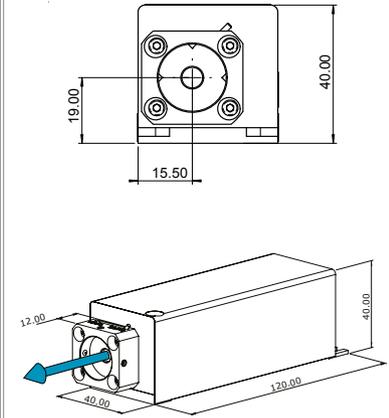


PPA - ControlBoxx

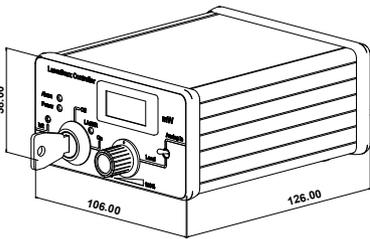



With power adjustable

PPF - RemoteBoxx

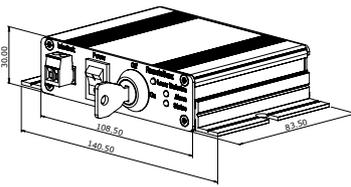

Standard fixed output power


Optional heatsink for LCX and LBX series

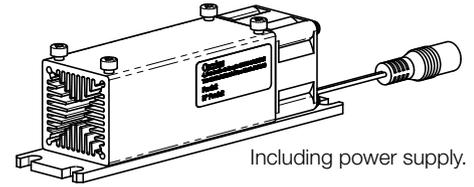


Including power supply.

Optional air-forced heat sink for maximum ambient temperature of 38°C.


LCX series, OEM  
DPSS Laser

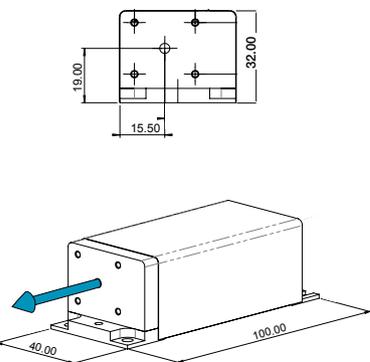


LPX series, OEM  
DPSS Laser

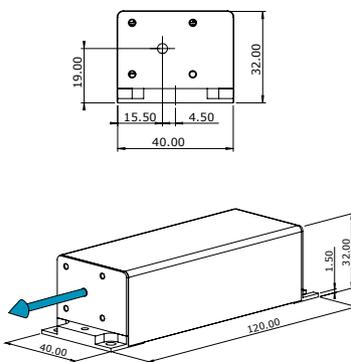

LBX series, OEM  
Stabilized laser diode

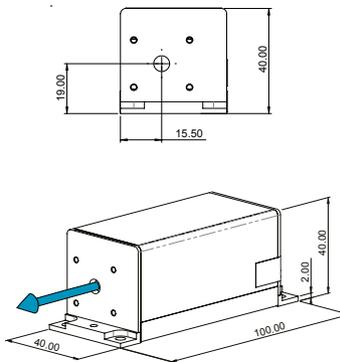

LSX series, OEM  
Stabilized laser diode  
Integrated isolator

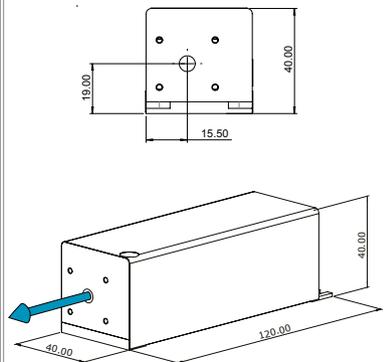

All-In-One laser head with built-in controllers. Input voltage range: 5-12 V DC

## Contact us:

Oxxius S.A.  
4 rue Louis de Broglie  
F-22300 Lannion, France

Phone: +33 296 48 70 28  
Fax: +33 296 48 21 90  
sales@oxxius.com  
www.oxxius.com



VISIBLE AND INVISIBLE LASER  
RADIATION  
AVOID EXPOSURE TO BEAM  
CLASS 3B LASER PRODUCT  
Power up to 500 mW

VISIBLE AND INVISIBLE LASER  
RADIATION  
AVOID EYE OR SKIN EXPOSURE TO  
DIRECT OR SCATTERED RADIATION  
CLASS 4 LASER PRODUCT