

LCX-561S DPSS laser

Optical characteristics *

Emission wavelength	561.4 nm (± 0.4 nm tolerance)
Spectral linewidth, FWHM	≤ 1 MHz
Wavelength stability over 8 hours, temperature within $\pm 3^{\circ}\text{C}$	≤ 1 pm
Coherence length	≥ 100 m
Side mode suppression ratio	≥ 30 dB

— Optical power

Part number	Free space output	Fiber-coupled output	
		Single mode	Multi mode fiber
LBX-561S-50-CSB-(OE/PPF)	50 mW	35mW	40 mW
LBX-561S-100-CSB-(OE/PPF)	100 mW	70 mW	80 mW
LBX-561S-150-CSB-(OE/PPF)	150 mW	105 mW	120 mW
LBX-561S-200-CSB-(OE/PPF)	200 mW	140 mW	160 mW

Power stability over 8 hour, temperature within $\pm 3^{\circ}\text{C}$	$\pm 1\%$
Control modes	Automatic Power Control (APC)
Optical noise 10 Hz-20 MHz bandwidth	$\leq 0.2\%$ rms

— External modulation

Analog Modulation	L1C-MPA option	L1C-AOM option
Rise / fall time	≤ 1 s	≤ 300 ns
-3dB modulation bandwidth	-	≥ 3 MHz
Digital Modulation		
Rise / fall time	≤ 30 ms	≤ 300 ns
-3dB modulation bandwidth	-	≥ 3 MHz

— Transverse singlemode free-space beam


Beam diameter (typ) at $1/e^2$, 5 cm from the beam aperture	0.7 mm
Beam divergence at $1/e^2$ full beam, in far field	1 mrad
Beam quality factor	$M^2 \leq 1.1$
Beam circularity , in far field	$\geq 90\%$
Polarization state	Linear, vertical at $\pm 5^{\circ}$
Polarization	$> 1000 : 1$

General specifications

	Plug and Play version	OEM version
Compliance	CE FDA 21 CFR 1040.10/1040.11	FDA 21 CFR 1040.10 / 1040.11
Operating temperature	10 to 38°C ambient air with optional heat sink	20 to 35°C baseplate
Power consumption	20 W max.	
Storage temperature	0 to 60°C	
Humidity	Up to 90%RH, non-condensing	
Supply voltage	100 to 240 VAC external power supply	5 to 12 VDC
Warm-up time	≤ 10 minutes	
Interfaces	USB ControlBoxx controller	USB, RS-232, electronic interface



Mechanical drawings

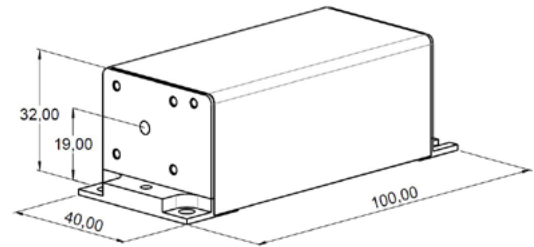

Plug and Play version provide with:

- RemoteBoxx controller
- Manual shutter
- DC power supply

Available options

- ACX-HTSK-1 Heat sink for operation in ambient air up to 38°C
- OPT-SHTE-LCX Electro-mechanical shutter
- L1C-MPA for power adjustment
- L1C-AOM for high speed modulation

Fiber coupling options **

	ACX-FCSMUV or ACX-FCPM	ACX-FCMM-R50
Power stability over 8 hours and within $\pm 3k$	$\pm 2.0\%$	$\pm 2.0\%$
Fiber optical characteristics	3.5 μm core diameter 0.11 N.A	50 μm core diameter 0.22 N.A
Polarization extinction ratio (ACX-FCPM only)	$> 1000 : 1$	n/a
Fiber output connector	FC/APC	FC/APC
Fiber length	2 m	2 m

Warranty : 18 months from shipment date

*Specifications at nominal power

** Variant are available on demand



CONTACT US

Oxxius S.A
4 rue Louis de Broglie
F-22300 Lannion, France

Phone : +33 296 48 70 28
sales@oxxius.com
www.oxxius.com