

LSX-785S-ISO

Diode-based
laser source

Optical characteristics *

| | |
|---|----------------------------------|
| Emission wavelength | 785 nm (± 0.5 nm tolerance) |
| Spectral linewidth, FWHM | ≤ 100 MHz |
| Wavelength stability over 8 hours, temperature within $+/-3^{\circ}\text{C}$ | ≤ 10 pm |
| Coherence length | ≥ 1 m |



— Optical power

| Part number | Free space output | Fiber-coupled output | |
|---------------------------|----------------------|----------------------|---------------------|
| | | Single mode | Multi mode fiber |
| LPX-785S-150-ISO-(OE/PPF) | 150 mW | 105 mW | 120 mW |

Power stability
over 8 hour, temperature within $+/-3^{\circ}\text{C}$

$\pm 1\%$

Control modes

Automatic Current Control (ACC)

Optical noise

10 Hz-20 MHz bandwidth

$\leq 0.2\%$ rms

— External modulation

| Analog Modulation | L1C-MPA option | L1C-AOM option |
|---------------------------|----------------|----------------|
| Rise / fall time | ≤ 1 s | ≤ 300 ns |
| -3dB modulation bandwidth | - | ≥ 3 MHz |
| Digital Modulation | | |
| Rise / fall time | ≤ 30 ms | ≤ 300 ns |
| -3dB modulation bandwidth | - | ≥ 3 MHz |

— Transverse singlemode free-space beam

Beam diameter (typ) at $1/e^2$,
5 cm from the beam aperture

0.5 mm

Beam divergence at $1/e^2$
full beam, in far field

3.1 mrad

Beam quality factor

$M^2 \leq 1.25$

Beam circularity, in far field

$\geq 90\%$

Polarization state

Linear, vertical at $\pm 5^{\circ}$

Polarization

> 100 : 1


General specifications

| | Plug and Play version | OEM version |
|-----------------------|--|--------------------------------------|
| Compliance | CE FDA 21 CFR 1040.10/1040.1 | FDA 21 CFR 1040.10 / 1040.11 |
| Operating temperature | 10 to 38°C ambiant air with optional heat sink | 20 to 35°C baseplate |
| Power consumption | 10 W max. | |
| Storage temperature | 0 to 60°C | |
| Humidity | Up to 90%RH, non-condensing | |
| Supply voltage | 100 to 240 VAC external power supply | 5 to 12 VDC |
| Warm-up time | | ≤ 2 minutes |
| Interfaces | USB ControlBoxx controller | USB, RS-232, electronic interface |



Oxxius operates a continuous improvement programme which can result in specifications being modified without notice.

Mechanical drawings

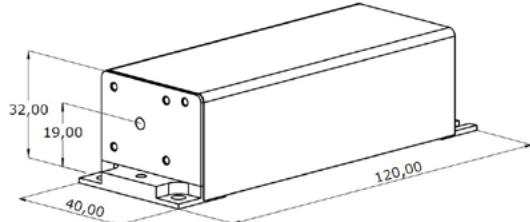

Plug and Play version provide with:

- RemoteBoxx controller
- Manual shutter
- DC power supply

Available options

- ACX-HTSK-1 Heat sink for operation in ambient air up to 38°C
- OPT-SHTE-LCX Electro-mechanical shutter
- L1C-MPA for power adjustment
- L1C-AOM for high speed modulation

Fiber coupling options **

| | ACX-FCSM or ACX-FCPM | ACX-FCMM-R50 |
|--|---|--|
| Power stability over 8 hours and within $\pm 3\%$ | $\pm 2.0\%$ | $\pm 2.0\%$ |
| Fiber optical characteristics | 3.5 μm core diameter 0.11 N.A | 50 μm core diameter 0.22 N.A |
| Polarization extinction ratio (ACX-FCPM only) | > 100 : 1 | n/a |
| Fiber output connector | FC/APC | FC/APC |
| Fiber length | 2 m | 2 m |

Warranty : 18 months from shipment date

*Specifications at nominal power

** Variant are available on demand

CONTACT US

Oxxius S.A
4 rue Louis de Broglie
F-22300 Lannion, France

Phone : +33 296 48 70 28
sales@oxxius.com
www.oxxius.com