

# LBX-830

Diode based laser source

## Optical characteristics \*

Emission wavelength 830 nm ( $\pm 5$  nm tolerance)

Linewidth, FWHM  $\leq 1.5$  nm

| Part number              | Free space output | Fiber-coupled output |                  |
|--------------------------|-------------------|----------------------|------------------|
|                          |                   | Single mode          | Multi mode fiber |
| LBX-830-100-CSB-(OE/PPA) | 200 mW            | 70 mW                | 80 mW            |

Power stability  $\pm 1\%$

over 8 hour, temperature within  $+/-3^{\circ}\text{C}$

Power adjustment range 0 to 100%

Control modes Automatic Current Control (ACC)  
Automatic Power control (APC)

Optical noise  $\leq 0.2\%$  rms  
10 Hz-20 MHz bandwidth

### External modulations

#### Analog Modulation

Rise / fall time  $\leq 200$  ns

-3dB modulation bandwidth  $\geq 2.5$  MHz

#### Digital Modulation

Rise / fall time  $\leq 5$  ns

-3dB modulation bandwidth  $\geq 150$  MHz

### Transverse singlemode free-space beam

Beam diameter (typ) at  $1/e^2$ ,  
5 cm from the beam aperture 0.9 mm

Beam divergence at  $1/e^2$   
full beam, in far field 2.2 mrad

Beam quality factor  $M^2 \leq 1.25$


Beam circularity, in far field  $\geq 90\%$

Polarization state Linear, vertical at  $\pm 5^{\circ}$


Polarization  $\geq 50:1$

## General specifications

|                       | Plug and Play version                          | OEM version                          |
|-----------------------|--|--------------------------------------|
| Compliance            | CE<br>FDA 21 CFR 1040.10/1040.11               | FDA 21 CFR 1040.10 / 1040.11         |
| Operating temperature | 10 to 38°C ambiant air with optional heat sink | 10 to 50°C baseplate                 |
| Power consumption     | 1 W typ. / 10 W max.                           |                                      |
| Storage temperature   | 0 to 60°C                                      |                                      |
| Humidity              | Up to 90%RH, non-condensing                    |                                      |
| Supply voltage        | 100 to 240 VAC<br>external power supply        | 5 to 12 VDC                          |
| Warm-up time          | $\leq 2$ minutes                               |                                      |
| Interfaces            | USB<br>ControlBoxx controller                  | USB, RS-232,<br>electronic interface |

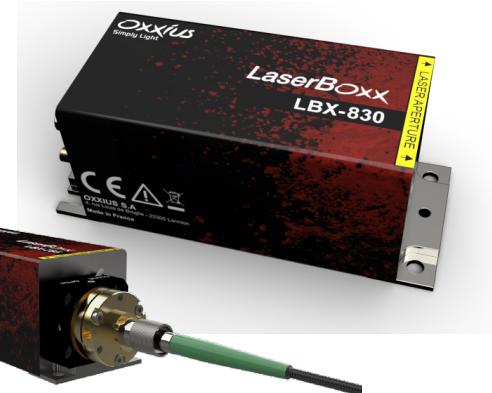

## Mechanical drawings

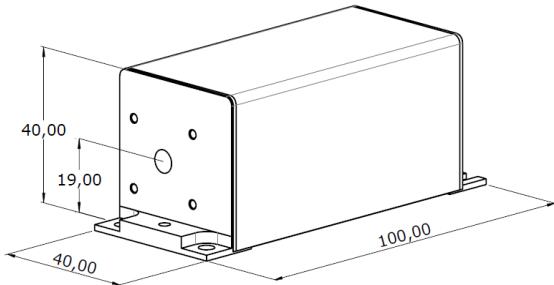

## Plug and Play version provide with:

- ControlBoxx controller
- Manual shutter
- DC power supply

## Available options

- OPT-SHTE-LCX Electro-mechanical shutter
- ACX-HTSK-1 Heat sink for operation in ambient air up to 38°C
- ACX-EXK Flange for improved stability
- OPT-CLUP-785 Clean-up filter

## Fiber coupling options \*\*

|  | ACX-FCSMUV or ACX-FCPMUV                    | ACX-FCMM-R50                               |
|--|---|--|
| Power stability<br>over 8 hours and within $\pm 3k$                          | $\pm 2.0\%$                                 | $\pm 2.0\%$                                |
| Fiber optical characteristics<br>3.5 $\mu\text{m}$ core diameter<br>0.11 N.A | 3.5 $\mu\text{m}$ core diameter<br>0.22 N.A | 50 $\mu\text{m}$ core diameter<br>0.22 N.A |
| Polarization extinction ratio<br>(ACX-FCPM only)                             | $\geq 50:1$                                 | n/a  |
| Fiber output connector   | FC/APC                                      | FC/APC                                     |
| Fiber length   | 2 m   | 2 m  |

Warranty : 12 months from shipment date

\*Specifications at nominal power

\*\* Variant are available on demand

## CONTACT US

Oxxius S.A  
4 rue Louis de Broglie  
F-22300 Lannion, France

Phone : +33 296 48 70 28  
sales@oxxius.com  
www.oxxius.com